


ONE-WAY PLOW



TCO-11T-63-SR-ST

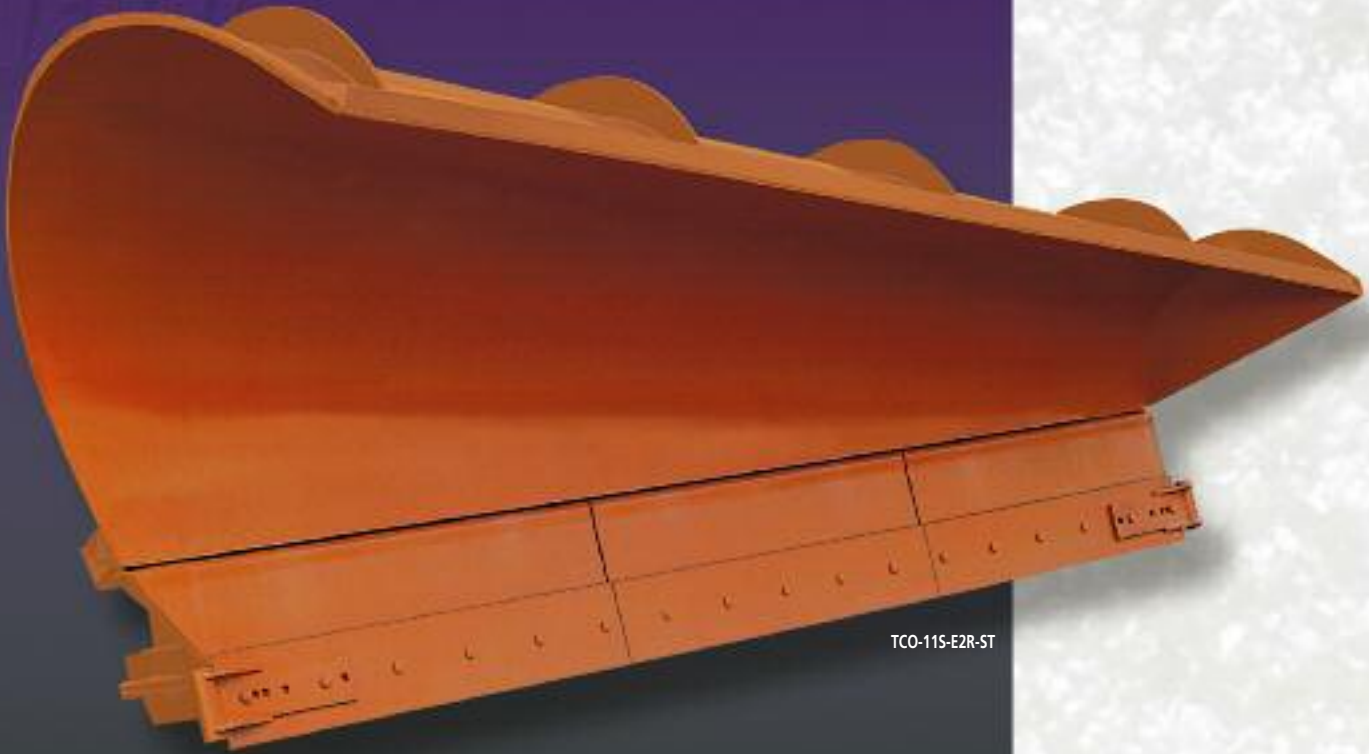

TCO-11S-E2R-ST

Full moldboard or bottom section safety trip mechanisms
Steel or Tenelene moldboard



SPECIFICATIONS

MODEL	MOLDBOARD MATERIAL	CLEARING PATH	CUTTING EDGE	INTAKE HEIGHT	DISCHARGE HEIGHT	WEIGHT
FULL MOLDBOARD TRIP ONE WAY PLOWS						
TCO-9T-45-SR-ST	.300" Tenelene	8'	1/2" x 6" x 108"	23"	45"	900 lbs.
TCO-10T-47-SR-ST	.300" Tenelene	9'2"	1/2" x 6" x 120"	26"	47"	980 lbs.
TCO-11S-55-SR-ST	10 ga. steel	9'3"	1/2" x 8" x 132"	30"	55"	2240 lbs.
TCO-11T-55-SR-ST	.300" Tenelene	9'3"	1/2" x 8" x 132"	30"	55"	2160 lbs.
TCO-11S-63-SR-ST	10 ga. steel	9'3"	1/2" x 8" x 132"	34"	63"	2400 lbs.
TCO-11T-63-SR-ST	.300" Tenelene	9'3"	1/2" x 8" x 132"	34"	63"	2300 lbs.
TCO-11S-66-SR-ST	10 ga. steel	9'3"	1/2" x 8" x 132"	38"	66"	2560 lbs.
TCO-11T-66-SR-ST	.300" Tenelene	9'3"	1/2" x 8" x 132"	38"	66"	2460 lbs.
TCO-12S-63-SR-ST	10 ga. steel	10'3"	1/2" x 8" x 144"	32"	63"	2340 lbs.
TCO-12T-63-SR-ST	.300" Tenelene	10'3"	1/2" x 8" x 144"	32"	63"	2285 lbs.
TCO-12S-68-SR-ST	10 ga. steel	10'3"	1/2" x 8" x 144"	36"	68"	2575 lbs.

BOTTOM TRIP EDGE ONE WAY PLOWS						
TCO-11S-E1R-ST	10 ga. steel	9'	1/2" x 8" x 132"	27"	48"	1550 lbs.
TCO-11S-E2R-ST	10 ga. steel	9'3"	1/2" x 8" x 132"	33"	57"	2450 lbs.
TCO-11S-57-E2R-HA2*	10 ga. steel	9'3"	1/2" x 8" x 132"	33"	57"	2550 lbs.

*one way moldboard with hydraulically reversible drive frame

- Roll formed moldboard for better snow dispersal
- Increased curvature along upper section to minimise snow blow back
- Cutting edge supported by sturdy backer angle
- Adjustable moldboard pitch
- Drive frame designed to withstand the rigors of severe snow removal conditions
- Safety caps on compression springs – full moldboard trip models only
- Height adjustable drive frame shoes
- Advantages of Tenelene moldboards include reduced weight, a non-corrosive material and a slick surface to prevent snow from adhering to plow



AVAILABLE OPTIONS

- Carbide cutting edge
- Rubber deflector
- Screw adjustable drive frame shoes
- Tencoloc swivel bar
- Quick tach swivel bar

At Tenco Machinery (CDN) Ltd, our policy is to meet the highest quality standards. In order to improve our products, changes in design or alterations might occur. It will in no way alter quality or efficiency of our equipment.

Tenco Machinery (CDN) Ltd *Trade mark of / Marque de commerce de Les Machineries Tenco (CDN) Ltée.
 Tenco Machinery (CDN) Ltd quality system certified ISO 9001-2000.
 Tenco Machinery (CDN) Ltd is now the exclusive authorised user of the Vohl® trade mark for snowblowers and sweepers.

CANADIAN PATENT NO.: 1,272,595
 AMERICAN PATENT NO.: 1,886,050

TENCO

Tenco Machinery (CDN) Ltd.
 1318, Principale
 St-Valérien-de-Milton, Québec
 Canada J0H 2B0
 Telephone: (450) 549-2411
 Fax: (450) 549-2410
 E-mail: mktg@tenco.ca
 Website: www.tenco.ca

Tenco USA Inc.
 5700 S. Lima Road
 Lakeville, New York
 14480-0635
 Telephone: (585) 346-3040
 Fax: (585) 346-2982
 E-mail: brian@tencousa.com
 Website: www.tencousa.com

Plamondon Camquip Ltée
 1116, Durance
 Charlesbourg, Québec
 G2N 1X2
 Telephone: (418) 849-7575
 Fax: (418) 849-4632
 (branch in Chicoutimi, QC)
 E-mail: amarchand@tenco.ca

Tenco New England Inc.
 450 N. Main Street
 Barre, VT 05641
 Telephone: (800) 451-5014
 Fax: (802) 476-1003
 (branch in Berwick, ME)
 E-mail: mikem@tenconewengland.com
 Website: www.tenconewengland.com

Distributed by: